



## Induction High Bay – Polycarbonate

Model: TL-GDD207-200C


Solar Lighting's High Bay lights are suitable for indoor commercial applications such as basketball courts, warehouses and workshop areas.

### Product Features

- Durable and corrosion resistant die casting aluminium electrical box with electrostatic spray surface
- High temperature resistant polycarbonate material
- Long lifetime - up to 100,000 hours
- IP43 Protection
- 3 year Warranty



Light distribution curve

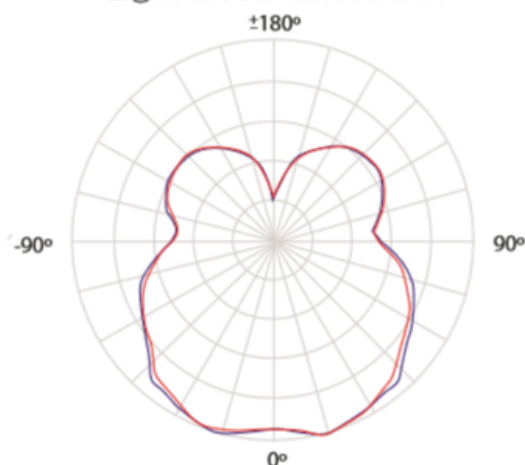

### SPECIFICATION

Colour	Cool White (5000K)
Lumens (Lm)	16,000
V.E Lumens (lm)	31360
Light Source	Induction
CRI (%)	>80%
Beam Angle	120
Power Requirement	AC 100~277V
Dimmable	No
Power Consumption	200W
Housing	Polycarbonate
Lifespan	> 100,000 hours
Operation Temperature	-20°C ~ +50°C
Dimension (mm)	420 Diameter x 540 (H) including hook
Weight	5.4kg
Protection Rating	IP43
Warranty	3 years