



## LED Flood Light with Polycarbonate Lens – 150W

Model: SLA-FL150W-PCT


LED flood lights are suitable for both outdoor and indoor commercial application such as parking areas, billboards and common areas.

### Product Features

- Quality Driver
- Aluminium die cast housing
- Polycarbonate face
- Full range power input 90-305VAC
- 366 x 330 x 70 mm
- 90° Beam Angle
- IP66 , IK10 housing



Vandal Resistance  
**IK10**

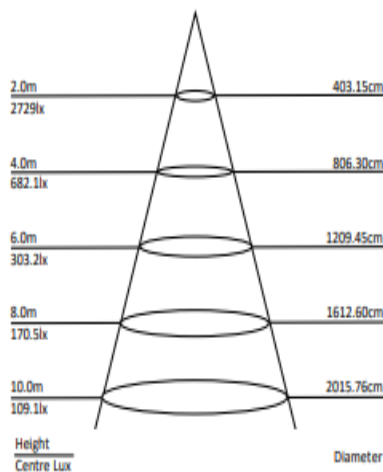

| SPECIFICATION         |  |
|-----------------------|--|
| Colour                | (4000K)                                    |
| Lumen (lm)            | 19,992Lm                                   |
| Efficiency (Lm/w)     | >140lm/w                                   |
| Light Source          | LED  |
| CRI (%)               | >80%                                       |
| Beam Angle            | 90°  |
| Power Requirement     | AC 90~305 V                                |
| Power Consumption     | 150W                                       |
| Housing               | Die Cast Aluminium with Polycarbonate Lens |
| Lifespan              | > 50,000 hours                             |
| Operation Temperature | -20°C~+60°C                                |
| Dimension (mm)        | 366 × 330 x 70 mm                          |
| Weight                | 5.2 kg                                     |
| Protection Rating     | IP66                                       |
| Warranty              | 5 years                                    |