



Solar Lighting Australia




LED Slimline Flood Light – 300W

Model:SLA-SFL300W

LED flood lights are suitable for both outdoor and indoor commercial applications such as parking areas, billboards and common areas.

Product Features

- 90° Beam Angle
- Aluminium die cast housing
- Toughened glass face
- Long operating life and performance
- Weight: 9.6kg
- IP66 Waterproof housing

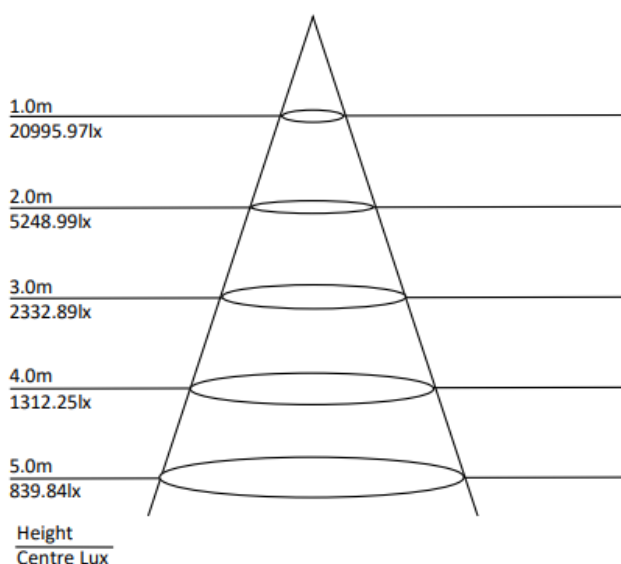

SPECIFICATION

Colour	Cool White (5000K)
Lumen (lm)	40949lm
Efficiency (Lm/w)	>137lm/w
Light Source	Lumileds 3030
CRI (%)	>80%
Beam Angle	90°
Power Requirement	AC 90~305V
Power Consumption	298.1W
Housing	Die Cast Aluminium and Toughened Glass
Lifespan	> 50,000 hours
Operation Temperature	-20°C~+60°C
Dimension (mm)	503 × 545 x 64mm
Impact Rating	IK08
Protection Rating	IP66
Warranty	5 years

Solar Lighting Australia. 1/13 Commerce Circuit, Yatala Qld 4207

Telephone: 1300 911 866

Website: solarlightingaustralia.com

Email: sales@solarlightingaustralia.com