




Induction High Bay – Mirrored Reflector TG Lens

Model: SLA-GDD226-200/250/300C

Solar Lighting's High Bay lights are suitable for indoor commercial applications such as basketball courts, warehouses and workshop areas.

Product Features

- Durable and corrosion resistant die casting aluminium electrical box with electrostatic spray surface
- Unique design
- Long lifetime - up to 100,000 hours
- IP66 Protection
- 3 year Warranty

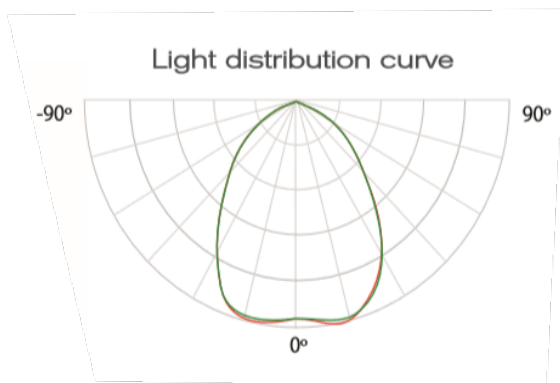

SPECIFICATION

Colour	Cool White (5000K)
Lumens (Lm)	16,000 - 21250 - 25,500
V.E Lumens (lm)	31360 - 41,650 - 49,980
Light Source	Induction
CRI (%)	>80%
Beam Angle	120
Power Requirement	AC 100~277V
Weight	200W - 7.45kg / 250W & 300W 9.6kg
Power Consumption	200W - 250W - 300W
Housing - Cover type	Die cast aluminium with tempered glass
Lifespan	> 100,000 hours
Operation Temperature	-20°C ~ +50°C
Dimension 200W (mm)	506 Diameter x 320 (H) including hook
Dimensions 250W & 300W	556 Diameter x 331 (H) including hook
Protection Rating	IP66
Warranty	3 years

Solar Lighting Australia. 1/13 Commerce Circuit, Yatala Qld 4207

Telephone: 1300 911 866

Website: solarlightingaustralia.com

Email: sales@solarlightingaustralia.com